


Industry: Pools & Leisure

# SwimLine PH

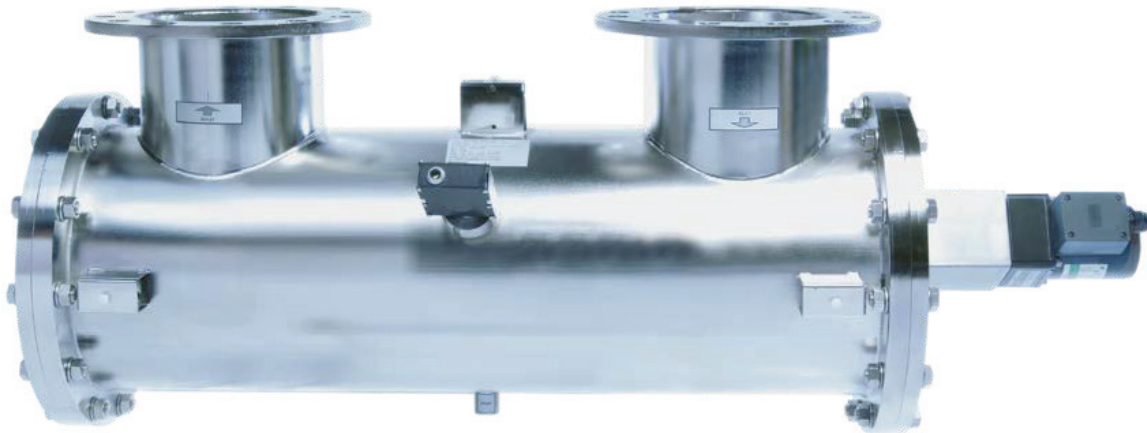


## UV treatment for pools and spas


**Our SwimLine PH UV systems deliver effective treatment (chloramine removal and disinfection) for all leisure facilities from spas through to large competition pools.**

By using medium pressure lamps we break down not only monochloramine but also di- and trichloramine which are responsible for eye and skin irritation, headaches and unpleasant odours. Using UV in the water treatment process provides bathers and staff with a pleasant and safe environment. UV has the added advantage of being effective against chlorine resistant microorganisms such as Cryptosporidium and is up to 5 times cheaper to maintain and occupies only 1/10th of the space of ozonation equipment.

# SwimLine PH™ - Single Pool with Ultraviolet treatment

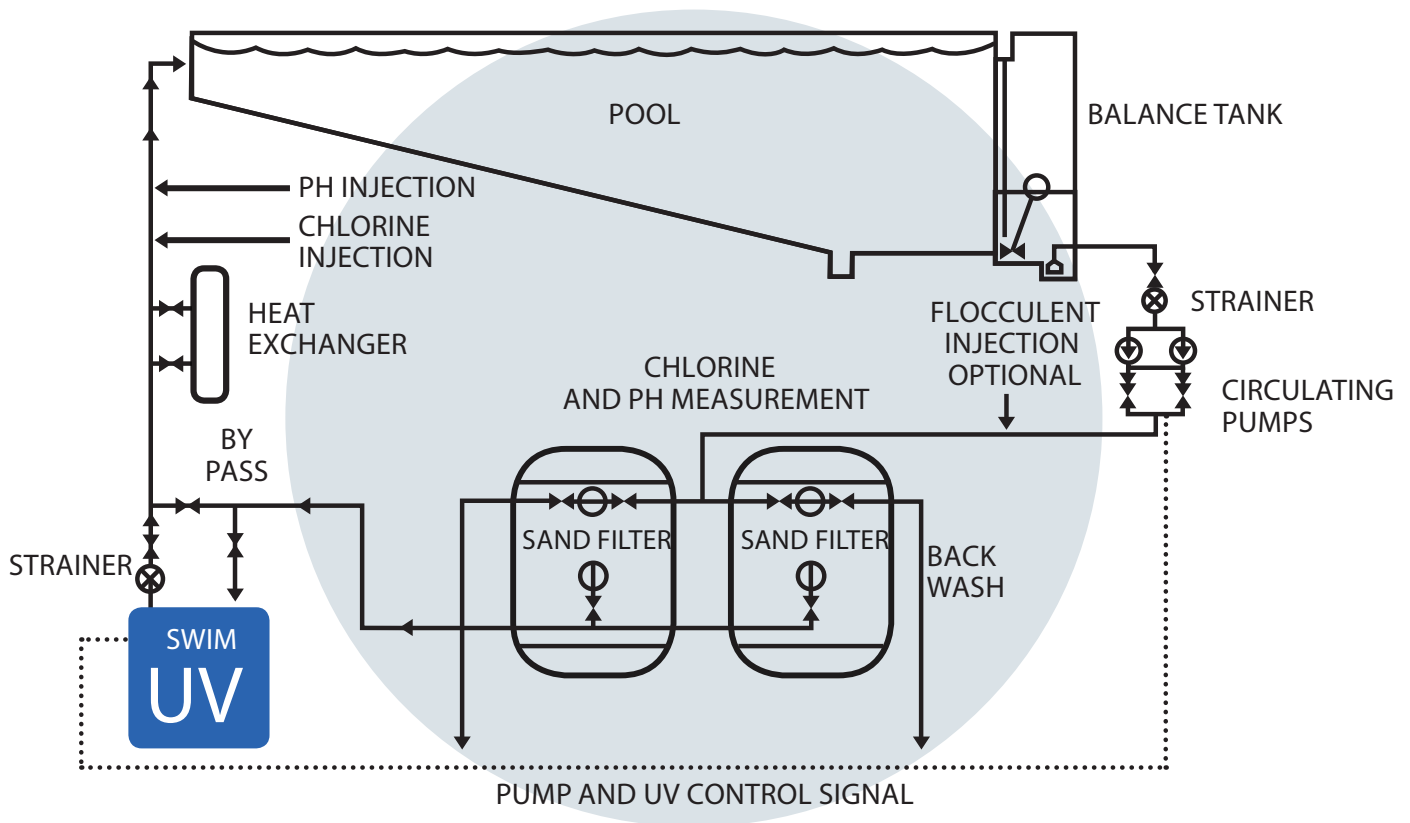

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
<b>INTELLIGENCE</b>		
UV intensity monitor	Continuous verification of performance with in-built low intensity alarm	Easy to monitor and log system performance
Flow meter input	Real time adjustment of lamp power based on flow	Saves power
<b>OPTIMISATION</b>		
Medium pressure lamp	Provides UV light at 200 to 400 nm wavelengths ideal for the destruction of mono-, di- and trichloramine	Visibly clear water with reduced odours
		Reduced corrosion risk
		Minimises bathers' eye and skin irritation
	Provides germicidal wavelengths to disinfect the water	Protect bathers from chlorine resistant microorganisms such as Cryptosporidium or Giardia
	Automatic wiper (quartz cleaning)	Self cleaning
<b>INTEGRATION</b>		
Designed specifically for pools	UVShield™ power cut-out for lamp access (option)	Enhanced operator safety when changing a lamp
	Water leak detection (option)	Increased bather safety when used with a strainer

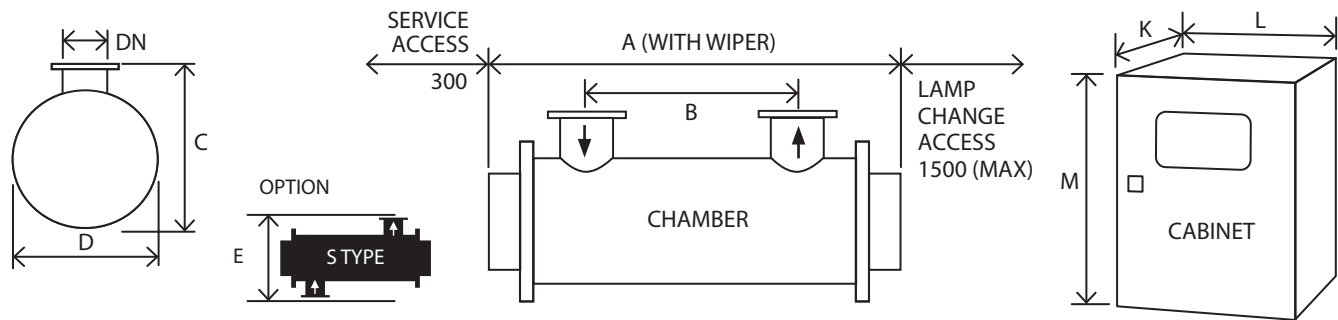

Model Number	Maximum Power (kW)	Min UVT (%)	Dimensions (mm)										Approx weight (Kg)	
			A	B	C	D	E	DN	K*	L	M**	Chamber (Empty)	Control Cabinet	
SwimLine PH 60	1.6	85	850	240	320	240	400	80	330	750	850	40	85	
SwimLine PH 70	1.6	85	850	240	320	240	400	100	330	750	850	45	85	
SwimLine PH120	2.7	78	1300	660	320	240	400	150	330	750	850	50	85	
SwimLine PH 195	4.4	81	1300	660	320	240	400	150	330	750	850	50	85	
SwimLine PH 295	4.4	90	1300	610	420	290	550	200	330	750	850	75	85	
SwimLine PH 470	5.8	84	1300	610	420	290	550	200	330	900	1100	75	165	
SwimLine PH 600	5.8	93	1300	550	505	410	600	250	330	900	1100	120	165	
SwimLine PH 705	5.8	93	1800	960	505	410	600	300	330	900	1100	160	165	
SwimLine PH 850	12.5	62	1800	960	505	410	600	300	330	1100	1600	160	270	
SwimLine PH 990	16.5	76	1800	930	540	430	650	350	330	1100	1600	200	282	

\* Allow dimension L in front of cabinet for door opening and panel access.

\*\* M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 250 mm). All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request.

All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements

UV CHAMBER	
Material:	Stainless steel 316L / 1.4404
Internal finish:	As made pipe and tube, welds as laid, electropolished and passivated
External finish:	Sateen polish (120 grit) electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN16
Drain connection:	BSPT
End plate:	Removable end plate
Degree of protection:	IP65 equivalent to NEMA 4 but not for outside use
Wiper:	Automatic (electrically driven)
Arc tube (lamp):	Medium pressure
Arc tube enclosure:	Pure quartz
Number of arc tubes (lamps):	1 to 4 dependent on model
Expected lamp life:	4000-8000 hours
Temperature sensor:	Yes
UV monitor:	Wet UV monitor (to minimum UVT)
Working fluid temperature:	5°C to 60°C (80°C unwiped)
Strainer:	Yes
Hydrostatically pressure tested:	Yes to PED requirements EN 13445
Chamber mounting:	Horizontal only
Operating pressure:	6 bar
Pressure loss:	Typically < 70 mbar
Seals:	EPDM

OPTIONS	
Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German and Spanish	
Flange options: ANSI 150 (with NPT drain), JIS, Table 'E'	
Lead length: 20 m, 30 m or 50 m cabinet to chamber	
Skid mounting	
Vent valve: Manual valve	

OPTIONS (CONTINUED)	
Aggressive water package: For 400 ppm to 20000 ppm chloride water	
UVShield™: Power cut-out for lamp access	
Water leak detection: Detects water leaks from quartz sleeve	
Chamber configuration: S shape	

CABINET	
Material:	Polyester coated carbon steel
Degree of protection:	IP54 NEMA 12
Supply voltages (nominal):	PH 60-120 95 V to 260V PH 195-705 190 V to 480 V PH 850-990 380 V to 480 V 50/60 Hz (voltage tolerance ± 10% of nominal)
Operating temperature range:	5°C to 40°C
Relative humidity:	<85% non-condensing
Cooling fans:	Yes
Interconnecting cable:	10 m cabinet to chamber
Power adjustment:	4 level power stepping

CUSTOMER OUTPUTS	
4-20 mA passive or active outputs:	UV intensity, UV dose
VFC outputs:	System warning, lamp ready, low UV intensity, common trip, remote reset, ELCB or water leak, system available, local or remote mode

CUSTOMER INPUTS	
4-20 mA passive or active input:	Flow meter
VFC inputs:	Remote stop/start and remote reset

CUSTOMER COMMUNICATIONS PORT	
None	

APPROVALS	
CE marked, UL listed E 149108	



**S P E C T R A**

**PROFESSIONAL UV SOLUTIONS**

Str. Zizinului, Nr. 110, 500407, Braşov, România  
[www.spectra.ro](http://www.spectra.ro) / [contact@spectra.ro](mailto:contact@spectra.ro) / (+40) 0770-187-379  
SPECTRA is a trademark of AKRO